

## Monthly Projects Update – December 2020

### Frances Terrace

- Lighting excavation/conduit layout works complete in stage 1, 2, 3, 4
- Excavation, preparation and reinstatement of kerbing complete in stage 1, 2, 3, 4
- Storm water installation works complete in stage 2, 3, 4.
- Pavement preparation works complete in stage 1, 2, 3, 4.
- Foamed bitumen stabilization complete in stage 1, 2, 3, 4.
- Asphaltting has been completed through stages 1,2,3 & 4.
- Stage 5 (roundabout) postponed until after the holiday season, February next year.
- Council staff to back fill and tidy up where required and install lighting to complete the works up to stage 5.



### Wallaroo Dog Park

- Wallaroo Dog Park is taking shape with fence posts installed and fencing complete.
- Concrete pads for air lock entry/ exit complete
- Internal asphalt footpath prepared and is due for sealing 28<sup>th</sup> November
- Dog agility and exercise equipment currently in fabrication.

### Illuminart

- Structure has been completed, including painting and air-conditioner.
- Internal shelving component to house the projectors has been fabricated and installed.
- Power to the structure has been completed and the building energised by SAPN.



## Monthly Projects Update – December 2020

### David Street

- Pavement and swale drain is nearing completion.
- Topcoat has been scheduled for sealing Monday, 30<sup>th</sup> November.



### Copper Coast Aerodrome

- The extension of taxi area for the aerial firefighting aircraft is nearing completion.
- Underground storm water installed to alleviate ponding issues.
- Profiling of the existing spray seal taxi area has been completed and is to be replaced by a 40mm thick asphalt seal on the 27<sup>th</sup> November.





## Monthly Projects Update – December 2020


### Kadina Cemetery

- Contractors are continuing works on the outside front wall for the duration of 2020
- Works will then commence on the Moonta cemetery walls in January 2021
- Internal perimeter to be cleaned up and gravel laid to assist with water run-off.



### Moonta Town Hall

- Short suspension to works from latest COVID-19 restrictions
- Internal painting close to completion
- Electrical reinstatement complete
- Existing lift up stage fronts have been removed and replaced with a permanent fixture that ties in with the heritage of the building.
- Final touch ups and floor polishing underway to complete project.

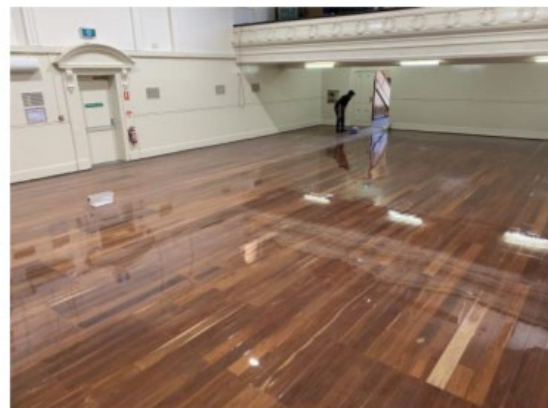

## Monthly Projects Update – December 2020

### Wallaroo Town Hall – Upgrade

- Demolition of existing toilets completed.
- Plumbing contractors 1<sup>st</sup> fix works to the new layout are complete.
- Carpentry contractors have been undertaking external construction works to extend the existing roof line that will be the new accessible toilet and;
- They have completed the stud framed 1<sup>st</sup> fix that will form the walls of the new foyer for the toilets.
- Internal carpentry works have been completed and plasterboard sheeting is being installed.



### Unsealed Roads

Stenning Road, Daddow Road, Paskeville Road, Copper Hill Road, Rodda Road, Koch Road, Bussenschutt Road, Rosslyn Road, Brittain Road, Fairfield Road, Laver Road, Martin Terrace, Waringa Road, Abbott Road, Mitchell Road, Manuel Road, Racecourse Road, Airport Road, Warburto Road, Dayman Road, Copper Lane, Morphett Terrace, Sandercock Road, Harris Road, Magazine Road, Waringa Road, Hayward Road, Cavanagh Road, Davidson Road, Franklin Road, Walter Road, McCauley Road, Hopgood Road, Point Riley Road, Kelly Road, Rees Road, Blackrock Road, Manuel Road, Rosewarne Road, Donaldson Road, Ellis Road, Heath Road, Bulls Road, Federal Avenue, Smith Avenue, Young Street, Creswell Street, Matta Road, Duncan Road, Lehman Road, Old Wallaroo Road, Anthony Terrace, Datson Road, Barkla Road, Moonta Cunliffe Road, Deeble Street.